



Product (model) Name		2DGB	3DGB
OTHERS			
Casters (quantity/material/qty of brake)		4 pc/steel/no brake	4 pc/steel/no brake
Adjustable footer (quantity/material)	Yes/No	No	No
Quantity of shelves (per door) x quantity of door.	shelves/door	5 x 2, Plasticized	5 x 3, Plasticized
Shelf dimensions	mm X mm	530x510	530x510
Drain system	Drain	Manual tray	Manual tray
Key & lock	Detail	No	No
Price tag holder (material)		Yes/plastic	Yes/plastic
Light box on top for Advertising	Light	No	No
COOLING SYSTEM			
Compressor brand	Model	Tecumseh Or Equivalent	Kulthron Or Equivalent
Refrigerant type	Type	R134a	R134a
Amount of refrigerant charged into machine	gms	300	400
Evaporator type/Material	Item	Fin & Coil type	Fin & Coil type
Evaporator fan (type/quantity/watt)	Item	Normal/1/36W	Normal/2/36W
Condenser type/Material	Item	MCHX (micro channel)	MCHX (micro channel)
Condenser fan (type/quantity/watt)	Item	Normal/1/36W	Normal/1/36W
Defrost system (heater or air force) & Self evap system	System	Auto Air force	Auto Air force
Expansion device (capillary or txv)	Type	Capillary	Capillary

* All specifications are subjected to change without prior notice as per the company policy of continuous improvement

Glass Door Chiller Plug-in



Glass Door Chiller Plug-in







CARRIER COMMERCIAL REFRIGERATION (THAILAND) LTD.
 14th – 15th Floor, Interlink Tower, 1858/63-74 Debaratna Road,
 Km. 4.5, Bangna Tai, Bangna, Bangkok, 10260, Thailand
 Tel: +66 (0) 2495 8800
 Fax: +66 (0) 2751 4796
<http://www.haiercarrier.com>

Benefits at a glance

- Low energy consumption
- Attractive merchandise display
- From kiosk to supermarket, it is easy to find space for this cabinet
- Service-friendly design and energy saving accessories

Basic models

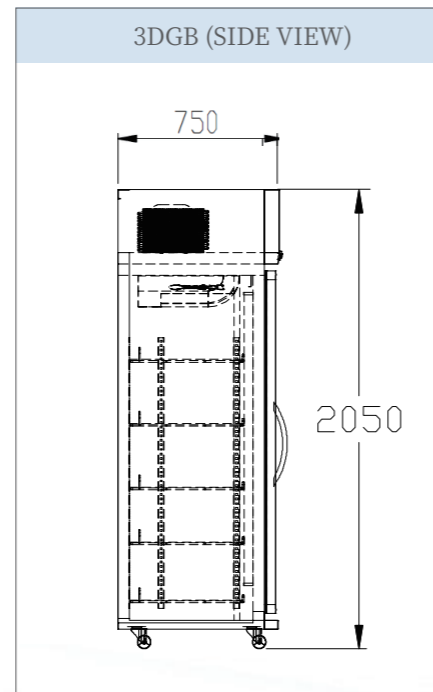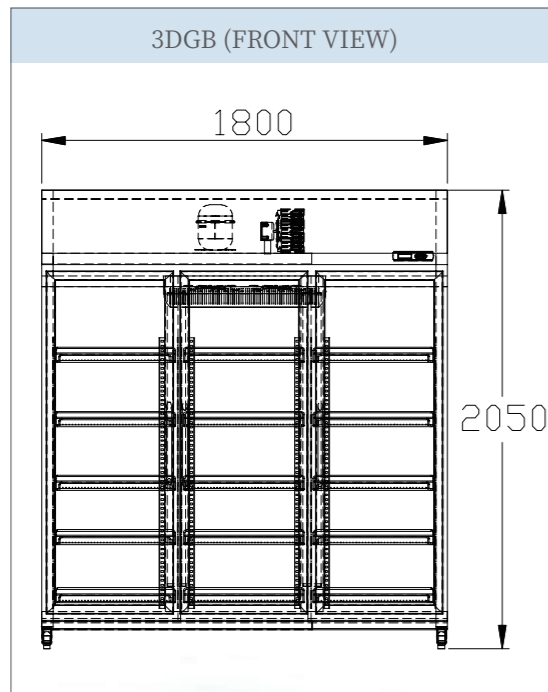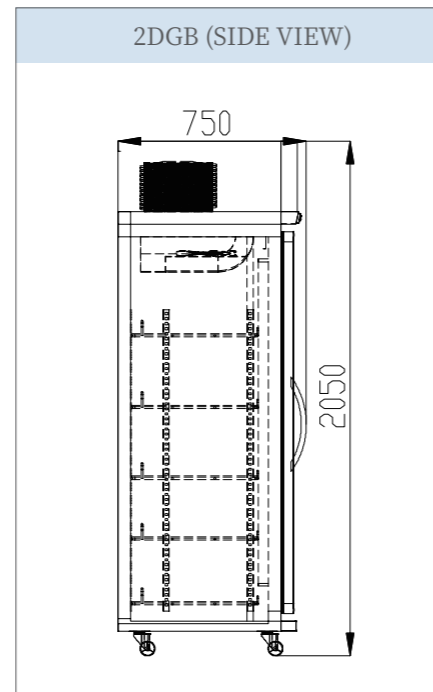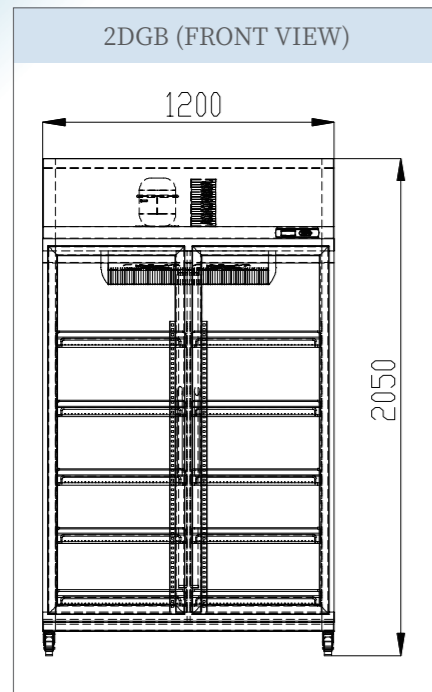

SPECIFICATION

Product (model) Name		2DGB	3DGB
GENERAL INFORMATION			
External dimension (W x D x H) including handle	mm	1200 x 755 x 2050	1800 x 755 x 2050
Internal dimension (W x D x H)	mm	1100 x 610 x 1530	1700 x 610 x 1530
Packing dimension (W x D x H) with EPS Foam	mm	1250 x 760 x 2075	1850 x 760 x 2075
Weight (gross include packing/net)	kg.	146/145	206/205
Temperature	°C	2~10 (at rated condition)	2~10 (at rated condition)
Ambient class		25 °C , 60% RH	25 °C , 60% RH
CONTROLLER SETTING AND ELECTRICAL DATA			
Voltage/Frequency	V/Hz.	230V/50 Hz	230V/50 Hz
Type of plug	Type	3 Pin plug	3 Pin plug
Length of power cord	m.	2.5	2.5
Temperature controller (type/color)	Detail	8 button/SS	8 button/SS
Temperature display	Monitor	Digital	Digital
Inner lamp (type/quantity)	Type	LED x 1	LED x 2
Power	watts	18	18
Color of light	Type	Day Light	Day Light
APPEARANCE			
External/Internal Material	Cabinet	Galvanize steel	Galvanize steel
Material grade	Spec	SGCC/Pre painted galvanized sheet	SGCC/Pre painted galvanized sheet
RAL Code	-	RAL 1013 (oyster white) RAL 9005 (jet black)	RAL 1013 (oyster white) RAL 9005 (jet black)
DOOR DETAILS			
Door frame material	Front	Aluminum	Aluminum
Anodized/painted	Type	Anodized	Anodized
Provision of heater	Yes/No	No	No
Front Glass door		2 layers/Low E	2 layers/Low E
Tempered glass (inner side)	Yes/No	No	No
Tempered glass (outer side)	Yes/No	Yes	Yes
Glass door thickness	mm	20	20
Auto close door (spring on the each door)	Detail	Yes/spring	Yes/spring
No of spring coil/force	No/N	1/door	1/door
Max degree of operation/Door opening	°C	100	100
Provision of door hold at maximum opening	Yes/No	Yes	Yes
Handle (material/color)	Type	Stainless Steel	Stainless Steel