



SUPERMARKET

Commercial Refrigeration Total Solution



Haier Carrier

Haier Carrier Refrigeration Equipment Co., Ltd.(Haier Carrier) is a joint venture established by Haier Group and US Carrier in 2001. After more than ten years of development, it has become one of the plants using the same technologies as the Carrier HQ. Its products include supermarket display cabinets, compressor units and inverter condensing units(scroll, piston and screw), and heat exchangers(air-cooled condenser and air cooler). It can provide customers with whole sets of frozen and chilled solutions. Relying on the support of Carrier's R&D centers in Mainz, Germany and Shanghai, China, the company now has several nationally recognized laboratories, and by constantly updating its products and system technologies, Haier Carrier is committed to providing its customers with CO2OLtec transcritical system and other advanced energy conservation and environmental protection systems.

In the past ten years, relying on abundant resources of the parent company, Haier Carrier has become a world-class facility that owns the ISO 9001, ISO 14001 certifications, the ACE certification of United Technologies(Carrier's parent) and other certifications. With strong R&D strength, Haier Carrier is able to provide world-class freezing and refrigerating integrated solutions such as D2D hot gas defrosting(national patent), supermarket cold chain and air-conditioner association system, refrigeration and hot water association system, Cascade CO₂ (carbon dioxide cascade refrigeration technology), and CO2OLtec(carbon dioxide transcritical refrigeration technology).

Carrier / United Technologies Corp.

Carrier is the world's leader in heating, air-conditioning and refrigeration solutions. Carrier is a part of UTC Climate, Controls & Security, a unit of United Technologies Corp., a leading provider to the aerospace and building systems industries worldwide. In 2017, the global sales of United Technologies Corp., reached 59.8 billion USD.

Haier Group

Since its establishment in 1984, Haier Group has become a global leading provider of better-life solutions. In the era of the Internet and the Internet of Things, Haier has transformed from a traditional manufacturing enterprise into a win-win IoT community ecology, leading global companies to establish an ecological brand of Internet of Things economy. Up to now, Haier Group boasts 10 R&D centers, 24 industrial parks, 108 manufacturing plants and 66 marketing centers across the world.

In 2017, the Haier Group achieved a global turnover of 241.9 billion Yuan.

**REDUCE YOUR CARBON FOOTPRINT
AND ENERGY COSTS. NATURALLY.**
Let's Work Together!

Qualification Certificates



2017-2018 Golden Cold Chain™ Award - in China's Cold Chain Industry
Top Ten Refrigeration and Thermal Insulation Equipment Suppliers




National Industrial Product Production License



GCCA Credit Certification



The Best Partner Award
Lawson East China 1000 Stores Achievement Award

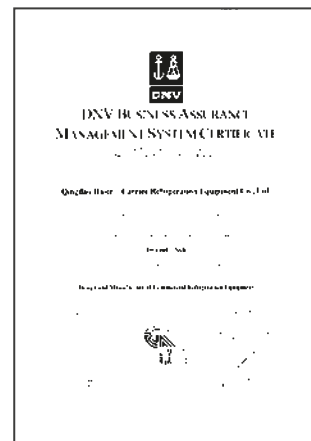

DNV Business Assurance
Management System Certificate



Environmental Management System
Certificate



Utility Model Patent Certificate

SUPERMARKET Commercial Refrigeration Total Solution

E6

Multidecks



-1~5°C Temperature Performance



+25% Storage Capacity



+10% Display Area



≥ -6°C Higher Evaporating Temperature



* All comparisons are based on the product performances of last generation. Data is rounding after being processed.



Product Features

- Full sized product lines (Depth 750/850/1050mm), applicable to stores with various layouts
- Modern appearance design, better display effect
- Temperature optimization, suitable for storage of various daily goods and meat
- Prepositive air curtain, for wider/bigger shelves volume, and with a cabinet of 750mm deep, optimizing the footprint
- Low front design(370mm), for bigger display area
- Higher evaporating temperature($\geq -6^{\circ}\text{C}$), more energy-efficient and environmentally friendly,
- Squeezed Multi-layer Air Curtain design, with better thermal insulation effect


E6

Multidecks




Technical Data


	Model	Dimensions /mm	Temperature Range/°C	Net Volume/m ³	Display Area/m ²	Net Weight /kg
Width: 1055mm Height: 2m	Mendos LU D/M 125A	1250*1055*2000	-1~-7/-1~5	1.01	2.29	280
	Mendos LU D/M 188A	1875*1055*2000	-1~-7/-1~5	1.51	3.43	400
	Mendos LU D/M 210A	2100*1055*2000	-1~-7/-1~5	1.89	3.84	440
	Mendos LU D/M 250A	2500*1055*2000	-1~-7/-1~5	2.01	4.58	520
	Mendos LU D/M 375A	3750*1055*2000	-1~-7/-1~5	3.02	6.86	720
Width: 855mm Height: 2m	Mendos EU D/M 125A	1250*855*2000	-1~-7/-1~5	0.79	2.16	230
	Mendos EU D/M 170A	1700*855*2000	-1~-7/-1~5	1.07	2.94	300
	Mendos EU D/M 188A	1875*855*2000	-1~-7/-1~5	1.18	3.06	320
	Mendos EU D/M 250A	2500*855*2000	-1~-7/-1~5	1.57	4.32	410
	Mendos EU D/M 375A	3750*855*2000	-1~-7/-1~5	2.36	6.49	580
Width: 755mm Height: 2m	Mendos XU D/M 125A	1250*755*2000	-1~-7/-1~5	0.67	2.09	220
	Mendos XU D/M 188A	1875*755*2000	-1~-7/-1~5	0.99	3.14	305
	Mendos XU D/M 250A	2500*755*2000	-1~-7/-1~5	1.33	4.19	390
	Mendos XU D/M 375A	3750*755*2000	-1~-7/-1~5	1.99	6.28	550
Width: 1055mm Height: 2.2m	Mendos LU D/M 125-L	1250*1055*2270	-1~-7/-1~5	1.32	2.50	285
	Mendos LU D/M 188-L	1875*1055*2270	-1~-7/-1~5	1.98	3.75	410
	Mendos LU D/M 210-L	2100*1055*2270	-1~-7/-1~5	2.21	4.20	450
	Mendos LU D/M 250-L	2500*1055*2270	-1~-7/-1~5	2.63	5.01	535
	Mendos LU D/M 375-L	3750*1055*2270	-1~-7/-1~5	3.95	7.50	740
Width: 855mm Height: 2.2m	Mendos EU D/M 125-L	1250*855*2270	-1~-7/-1~5	1.08	2.37	235
	Mendos EU D/M 170-L	1700*855*2270	-1~-7/-1~5	1.47	3.23	310
	Mendos EU D/M 188-L	1875*855*2270	-1~-7/-1~5	1.63	3.56	330
	Mendos EU D/M 250-L	2500*855*2270	-1~-7/-1~5	2.16	4.75	425
	Mendos EU D/M 375-L	3750*855*2270	-1~-7/-1~5	3.25	7.12	600
Width: 755mm Height: 2.2m	Mendos XU D/M 125-L	1250*755*2270	-1~-7/-1~5	0.84	2.37	230
	Mendos XU D/M 188-L	1875*755*2270	-1~-7/-1~5	1.26	3.56	320
	Mendos XU D/M 250-L	2500*755*2270	-1~-7/-1~5	1.68	4.75	410
	Mendos XU D/M 375-L	3750*755*2270	-1~-7/-1~5	2.53	7.12	580

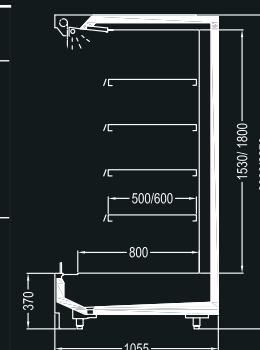

Mendos LU

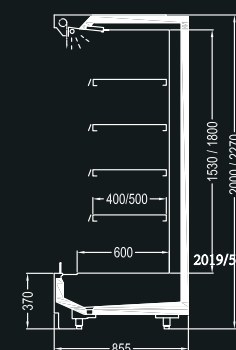

Mendos EU



Mendos XU

2019/5/10 13:03:51

* All comparisons are based on the product performances of last generation. Data is rounding after being processed.

SUPERMARKET Commercial Refrigeration Total Solution

E6

Glass Door Multidecks

 **-1~5°C** Temperature Performance

 **+25%** Storage Capacity

 **+15%** Display Area

 **-60%** Compared with the Energy Consumption of Self-service Counters

 **≥ -4°C** Higher Evaporating Temperature



* All comparisons are based on the product performances of last generation. Data is rounding after being processed.



Product Features

- Full sized product lines (Depth 750/850/1050mm), applicable to stores with various layouts
- Modern appearance, frameless door design, highlighting goods display
- Temperature optimization, suitable for storage of various daily goods and meat
- Prepositive air curtain, for wider/bigger shelves volume, and with a cabinet of 750mm deep, optimizing the footprint
- Low front design(370mm), for bigger display area
- Squeezed Multi-layer Air Curtain design, with better thermal insulation effect
- Higher evaporating temperature($\geq -4^{\circ}\text{C}$), more energy-efficient and environmental friendly


E6

Glass Door Multidecks




Technical Data

		Model	Dimensions /mm	Temperature Range/°C	Net Volume/m ³	Display Area/m ²	Net Weight /kg
Width: 1055mm Height: 2m	2 Doors	MenEco LU D/M 125A	1250*1055*2000	-1~7/-1~5	1.01	1.85	340
	3 Doors	MenEco LU D/M 188A	1875*1055*2000	-1~7/-1~5	1.51	2.55	490
	3 Doors	MenEco LU D/M 210A	2100*1055*2000	-1~7/-1~5	1.89	2.68	540
	4 Doors	MenEco LU D/M 250A	2500*1055*2000	-1~7/-1~5	2.01	3.24	640
	6 Doors	MenEco LU D/M 375A	3750*1055*2000	-1~7/-1~5	3.02	4.63	900
Width: 855mm Height: 2m	2 Doors	MenEco EU D/M 125A	1250*855*2000	-1~7/-1~5	0.79	1.70	290
	2 Doors	MenEco EU D/M 170A	1700*855*2000	-1~7/-1~5	1.07	2.05	385
	3 Doors	MenEco EU D/M 188A	1875*855*2000	-1~7/-1~5	1.18	2.39	410
	4 Doors	MenEco EU D/M 250A	2500*855*2000	-1~7/-1~5	1.57	3.09	530
	6 Doors	MenEco EU D/M 375A	3750*855*2000	-1~7/-1~5	2.36	4.47	760
Width: 755mm Height: 2m	2 Doors	MenEco XU D/M 125A	1250*755*2000	-1~7/-1~5	0.67	1.62	280
	3 Doors	MenEco XU D/M 188A	1875*755*2000	-1~7/-1~5	0.99	2.31	395
	4 Doors	MenEco XU D/M 250A	2500*755*2000	-1~7/-1~5	1.33	3.01	510
	6 Doors	MenEco XU D/M 375A	3750*755*2000	-1~7/-1~5	1.99	4.39	730
Width: 1055mm Height: 2.2m	2 Doors	MenEco LU D/M 125-L	1250*1055*2270	-1~7/-1~5	1.32	1.88	350
	3 Doors	MenEco LU D/M 188-L	1875*1055*2270	-1~7/-1~5	1.98	2.82	510
	3 Doors	MenEco LU D/M 210-L	2100*1055*2270	-1~7/-1~5	2.21	3.15	560
	4 Doors	MenEco LU D/M 250-L	2500*1055*2270	-1~7/-1~5	2.63	3.75	670
	6 Doors	MenEco LU D/M 375-L	3750*1055*2270	-1~7/-1~5	3.95	5.63	940
Width: 855mm Height: 2.2m	2 Doors	MenEco EU D/M 125-L	1250*855*2270	-1~7/-1~5	1.08	1.78	300
	2 Doors	MenEco EU D/M 170-L	1700*855*2270	-1~7/-1~5	1.47	2.43	400
	3 Doors	MenEco EU D/M 188-L	1875*855*2270	-1~7/-1~5	1.63	2.68	430
	4 Doors	MenEco EU D/M 250-L	2500*855*2270	-1~7/-1~5	2.16	3.56	560
	6 Doors	MenEco EU D/M 375-L	3750*855*2270	-1~7/-1~5	3.25	5.35	800
Width: 755mm Height: 2.2m	2 Doors	MenEco XU D/M 125-L	1250*755*2270	-1~7/-1~5	0.84	1.78	295
	3 Doors	MenEco XU D/M 188-L	1875*755*2270	-1~7/-1~5	1.26	2.68	420
	4 Doors	MenEco XU D/M 250-L	2500*755*2270	-1~7/-1~5	1.68	3.56	545
	6 Doors	MenEco XU D/M 375-L	3750*755*2270	-1~7/-1~5	2.53	5.35	780

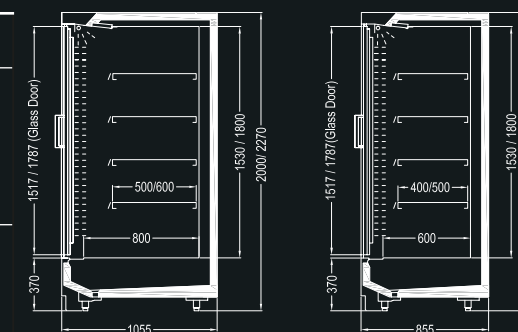

MenEco LU

MenEco EU



MenEco XU

* All comparisons are based on the product performances of last generation. Data is rounding after being processed.

SUPERMARKET Commercial Refrigeration Total Solution

Avanza

Freezer




Technical Data

	Model	Dimensions /mm	Temperature Range/°C	Net Volume/m ³	Display Area/m ²	Net Weight /kg
2.0m Multidecks	2 Doors DB-AGDF2D156	1562*945*2040	≤-18	1.32	1.44	380
	3 Doors DB-AGDF3D235	2343*945*2040	≤-18	2.00	2.16	520
	4 Doors DB-AGDF4D313	3124*945*2040	≤-18	2.62	2.88	700
	5 Doors DB-AGDF5D390	3900*945*2040	≤-18	3.32	3.60	840
2.2m Multidecks	2 Doors DB-AGDF2D156L	1562*945*2220	≤-18	1.47	1.60	400
	3 Doors DB-AGDF3D235L	2343*945*2220	≤-18	2.21	2.40	550
	4 Doors DB-AGDF4D313L	3124*945*2220	≤-18	2.94	3.20	750
	5 Doors DB-AGDF5D390L	3900*945*2220	≤-18	3.68	4.00	890

Product Features

- 2-5 door options, free combination for various stores
- Unique design of 3-layer hollow anti fog glass door, for better visibility of merchandise for thermal insulation and energy saving
- Higher evaporating temperature(-28°C), more energy-efficient and more environmentally friendly, Slow-close glass doors, avoiding strong hit of glass doors against cabinets

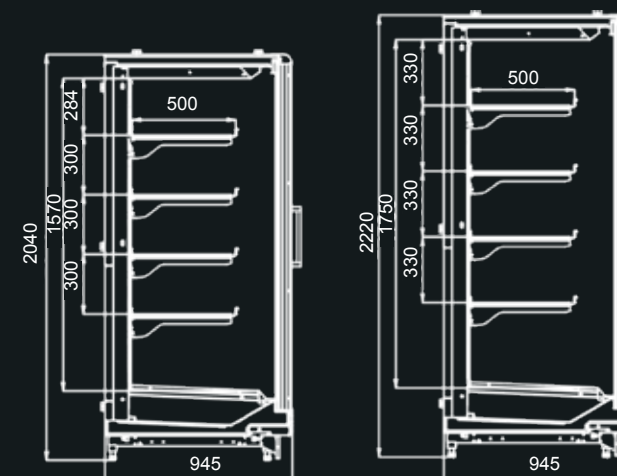

* All comparisons are based on the product performances of last generation. Data is rounding after being processed.

SUPERMARKET Commercial Refrigeration Total Solution



Avanza

Narrow Glass Door Freezer/Chiller Multidecks



Technical Data

	Model	Dimensions /mm	Temperature Range/°C	Net Volume/m ³	Display Area/m ²	Net Weight /kg
Standard Chiller	5 Doors DB- T80- 1900 5DA4C	3905*800*1900	2~7	2.75	3.94	715
	4 Doors DB- T80- 1900 4DA4C	3124*800*1900	2~7	2.20	3.15	600
	3 Doors DB- T80-1900 3DA4C	2343*800*1 900	2~7	1.65	2.37	445
	2 Doors DB- T80-1900 2DA4C	1562*800*1900	2~7	1.10	1.58	330
	5 Doors DB- T80- 2000 5DA4C	3905*800*2000	2~7	2.95	4.22	765
	4 Doors DB- T80- 2000 4DA4C	3124*800*2000	2~7	2.36	3.38	640
	3 Doors DB- T80- 2000 3DA4C	2343*800*2000	2~7	1.77	2.53	475
	2 Doors DB- T80- 2000 2DA4C	1562*800*2000	2~7	1.18	1.69	350
	5 Doors DB- T70-1900 5DA4C	3905*710*1900	2~7	1.93	3.94	690
	4 Doors DB- T70-1900 4DA4C	3124*710*1 900	2~7	1.54	3. 15	600
Standard Freezer	3 Doors DB- T70- 1900 3DA4C	2343*710*1900	2~7	1.16	2.37	445
	2 Doors DB- T70- 1900 2DA4C	1562*710* 1900	2~7	0.77	1.58	320
	5 Doors DB- T80- 1900 5DA8F	3905*800*1900	≤ -18	2.75	3.26	765
	4 Doors DB- T80- 1900 4DA8F	3124*800*1900	≤ -18	2.20	2.61	640
	3 Doors DB- T80- 1900 3DA8F	2343*800*1900	≤ -18	1.65	1.96	475
	2 Doors DB- T80- 1900 2DA8F	1562*800* 1900	≤ -18	1.10	1.30	350
	5 Doors DB- T80- 2000 5DA8F	3905*800*2000	≤ -18	2.95	3.99	815
	4 Doors DB- T80- 2000 4DA8F	3124 *800*2000	≤ -18	2.36	2.79	680
	3 Doors DB- T80- 2000 3DA8F	2343*800*2000	≤ -18	1.77	2.09	505
	2 Doors DB- T80- 2000 2DA8F	1562*800*2000	≤ -18	1.18	1.40	370
	5 Doors DB- T70- 1900 5DA8F	3905*710*1900	≤ -18	1.93	3.26	740
	4 Doors DB- T70- 1900 4DA8F	3124*710*1900	≤ -18	1.54	2.61	640
	3 Doors DB- T70-1900 3DA8F	2343*710*1900	≤ -18	1.16	1.96	460
	2 Doors DB- T70-1900 2DA8F	1562*710* 1900	≤ -18	0.77	1.30	340

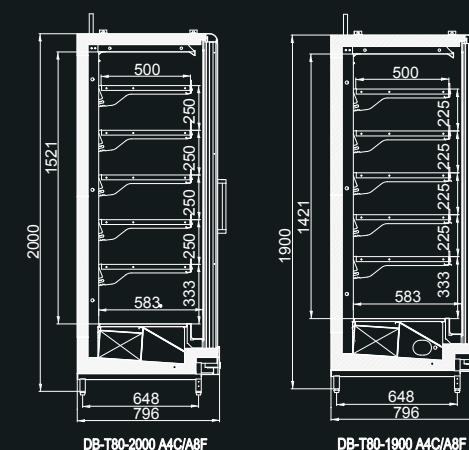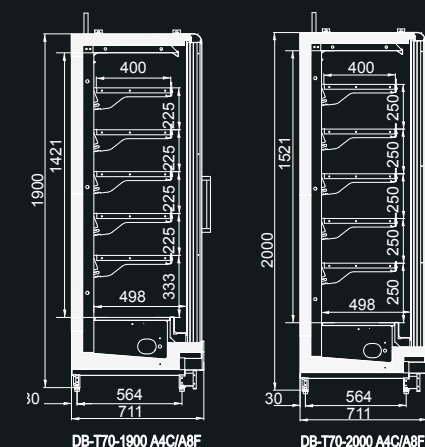

Product Features

- Narrow cabinet design to save space for markets
- Same appearance for freezer/chiller, for improved overall display effect
- 2-5 door options, free combination for various stores
- Unique design of 3-layer hollow anti fog glass door, for better visibility of merchandise for thermal insulation and energy saving
- 1.9/2m height options and 710mm/800 width options, for optimized space utilization in the stores

* All comparisons are based on the product performances of last generation. Data is rounding after being processed.

SUPERMARKET Commercial Refrigeration Total Solution



Public Wechat Account

Qingdao Haier Carrier Refrigeration Equipment Co., Ltd.
Address: No. 3734 Tuanjie Road, Huangdao District, Qingdao, China
Zip code: 266103
Website: www.haiercarrier.com
E-mail: sales.qhc@haiercarrier.com
Service Hot line: (86) 400-678-1888

For changes of products and product specifications, there will be no further notification. There may be some difference between the actual products and the pictures. All products do not have all the features. The products delivered vary with regions. Please contact your sales representatives.

© 2019 Qingdao Haier Carrier Refrigeration Equipment Co., Ltd.
SP0001-CA-201901-R01-EN